MAR 30 2004 18:31 FR VISTEON -EMS, SI PROJ. 313 248 6279 TO 97349946331

03/30/2004 17:08 PAX 17349946331

BRINKS, HOFER, ET AL

Ø 002

Serial No.; 09/915,791 Attorney Docket No.: 10541-066

DECLARATION OF

INVENTOR UNDER 37 C.F.R. §1.131

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Group Art Unit: 2834

Examiner:

Jaydi A. Aguirrechea

Inventors:

Jon Barry Joachim

Serial No.:

09/915,791

Filing Date:

July 26, 2001

Title: Electric Machine Rotor with Crankshaft

Torsional Damper

Commissioner for Patents U.S. Patent and Trademark Office Washington, DC 20231

Dear Sir:

- 1. Jon Barry Joachim, hereby declare that:
- 1. I am the inventor of the invention claimed and described in the aboveidentified application.
- 2. Prior to January 5, 2000, I conceived said invention in the subject application in the United States, as evidenced by the Invention Disclosure form (dates redacted) which is attached as Exhibit A.
- 3. Prior to January 5, 2000, I reduced to practice sald invention in the subject application in the United States, as evidences by the "Records of Completion" (date reducted) found in the Invention Disclosure form which is attached as Exhibit A.
- 3. Said Invention Disclosure form was completed and submitted prior to January 5, 2000.

03/31/2004 13:44 FAX 17349946331 BRINKS, HOFER, ET AL

MAR 30 2004 18:31 FR VISTEON -EMS,SI PROJ.313 248 6279 TO 97349946331

03/30/2004 17:08 FAX 17349948331 BRINKS HOFER ET AL

Ø 010 P.02

2003

Serial No.: 09/915,791 Attorney Docket No.: 10541-086

4. That all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statement may jeopardize the validity of the above-identified application, and any patent issuing thereon or any patent to which this declaration is direction.

Jon Barry Joachim



Current owner company. Change?

Visteon.

DIRECTORY

FGTI

HUB

Related Links: <u>View Invention Disclosure</u> | <u>Assign/Evaluate Disclosure</u> | <u>View Invention Ranking</u>

Online Invention Disclosure: View Invention Disclosure

Inv. Discl. Docket No:

199-1994

Creation Date:

Approval to submit was given by:

JJOACHIM:

Section 1: INVENTION DESCRIPTION

Title of Invention:

ELECTRIC MACHINE ROTOR WITH

CRANKSHAFT TORSIONAL DAMPER

Patent Evaluation

SVETS

Committee:

CPSC Code:

03.05.08

Originating Country

US

None

Code:

Code

Related Disclosure(s):

Section 2: PROBLEM & SOLUTION

Description or Comments: A starter/generator (s/g) rotor that incorporates the

crankshaft (c/s) torsional damper. This rotor/damper assembly would be located on the front of the c/s - same as current damper pulleys and with similar attachment. The problem: present s/g concepts position the assembly between the engine and transmission - complicating assembly, service, maintenance, and typically requiring unique attaching parts. The solution: position the s/g on the front of the engine. Additionally, integrate the c/s damper into the rotor of the s/g - simplifying and reducing the number of parts. Current s/g concepts are generally located on the rear of the c/s between the engine and transmission - restricting access for installation and service and usually requiring additional features/components for installation. This position also complicates the interfaces with the engine, transmission and electronic controllers. By locating the s/g on the front of the engine, the "traditional" powertrain remains intact. By incorporating a damper into the s/g rotor assembly, the number of separate parts are reduced and simplified. The s/g may even be utilized by the engine

controller to alter/reduce powertrain NVH. The accessory drive remains or can be eliminated.

Attachment:

See Section: 9 ATTACHMENTS

Section 3: PRIOR ART

Description or Comments: Many found on front of crankshaft dampers (pulley) -

none incorporating an electric machine rotor.

WO9805882 - ISAD - showing a starter/generator with a damper in the assembly. ISAD concept has a spring type mechanical damper meant for isolation/control of gear rattle in transmission - not for crankshaft torsional

vibration control.

Attachment:

See Section: 9 ATTACHMENTS

Section 4: NEW TECHNOLOGY

Description or Comments: The positioning of the starter/generator (s/g) on the front

of the engine. The use of the s/g rotor as the active mass of the crankshaft (c/s) torsional damper (typically an accessory drive pulley (sheave) is the active mass.) The ensuing packaging advantages for the system comprising the s/g and the s/g controller, battery and the other accessory driven components (w/elimination of the front

end accessory drive (fead)). A reduction in the

complexity of the system interfaces acssociated with the s/g and powertrain and accessory drive components.

Attachment:

See Section:9 ATTACHMENTS

Section 5: DETAILED DESCRIPTION

Description or Comments: With reference to attached paper sketches -

starter/generator (s/g) rotor (1) fixedly attached to flange (2) by fasteners (6) forming active mass of rotor/damper assembly. Outer flange (2) fixedly attached to hub (4) through elastomeric element (3). Hub (4) attached to crankshaft (7) on pressfit (typical) bore by bolt(8). Note that rotor (I) attachment to outer flange (2) may be direct by pressfit or by bonding directly to elastomer (3).

See Section: 9 ATTACHMENTS

Attachment:

Section 6: DATES

Record(s) of Completion: Date of Completion:

First Production Use:

[Model and Date]

Section 7: CATEGORY QUESTIONS

Invention Category:

Mechanical

Category Questions do not exist or not answered.

Section 8: MISCELLANEOUS ITEMS

Is it a Government Contract?:

No

If yes, Government Contract Number:

Identify a government agreement,

partnership, consortium, or other company involved with conception or first building of

the invention:

If disclosed to non-Company personnel,

identify recipient and date:

Section 9: ATTACHMENTS

| File Name | Description |
|--|------------------------------|
| Click on File Name to view and print it. | |
| Files submitted before Feb. '00 may be | |
| found in OLD & others in NEW | |
| 9881 rotrdrupr.gif: QLD NEW | Sketch of concept described. |

Section 10: INVENTORSHIP

CDS or Other Id: JOACHIM
Last Name: Joachim

Last Name: Joachim
First Name: Jon
Middle Name: Barry

Employment Category: S
Employment Status: A

Job Title: Systems Engineer
Email: jjoachim@visteon.com

Office Phone Number: -1-313-2488705- 755-5762

Fax: 1-313-2485167

Social Security or Company ID Number: [This field is blocked out intentionally.]

Citizenship: US

Home Address Line 1: 560 Fort Dearborn Street

Home Address Line 2:

City, State & Zip Code: Dearborn, Michigan 48124

Country Code: US

Employee of: Ford Motor Company U

Department: A612

Organization Code: EL6440EEG

Payroll Location Code: 1239


Office Address: FRL 3139 or VTC-AP 42A20

Maildrop: 1170

Supervisor's CDS Id: RMOHAN

Monogor's CDS Id: PCHAPEKI

Manager's CDS Id: PCHAPEKI

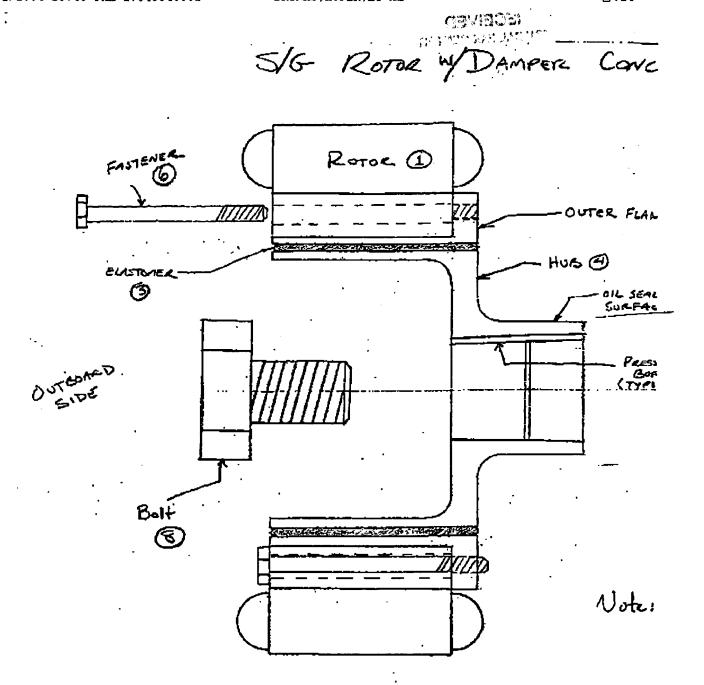

OPTION: Increase rotor ID; Presefit outer flogse for assembly (vs. bilt on as shown)
Attach FEAD pulley to attach side if req.

